





AMBIENT

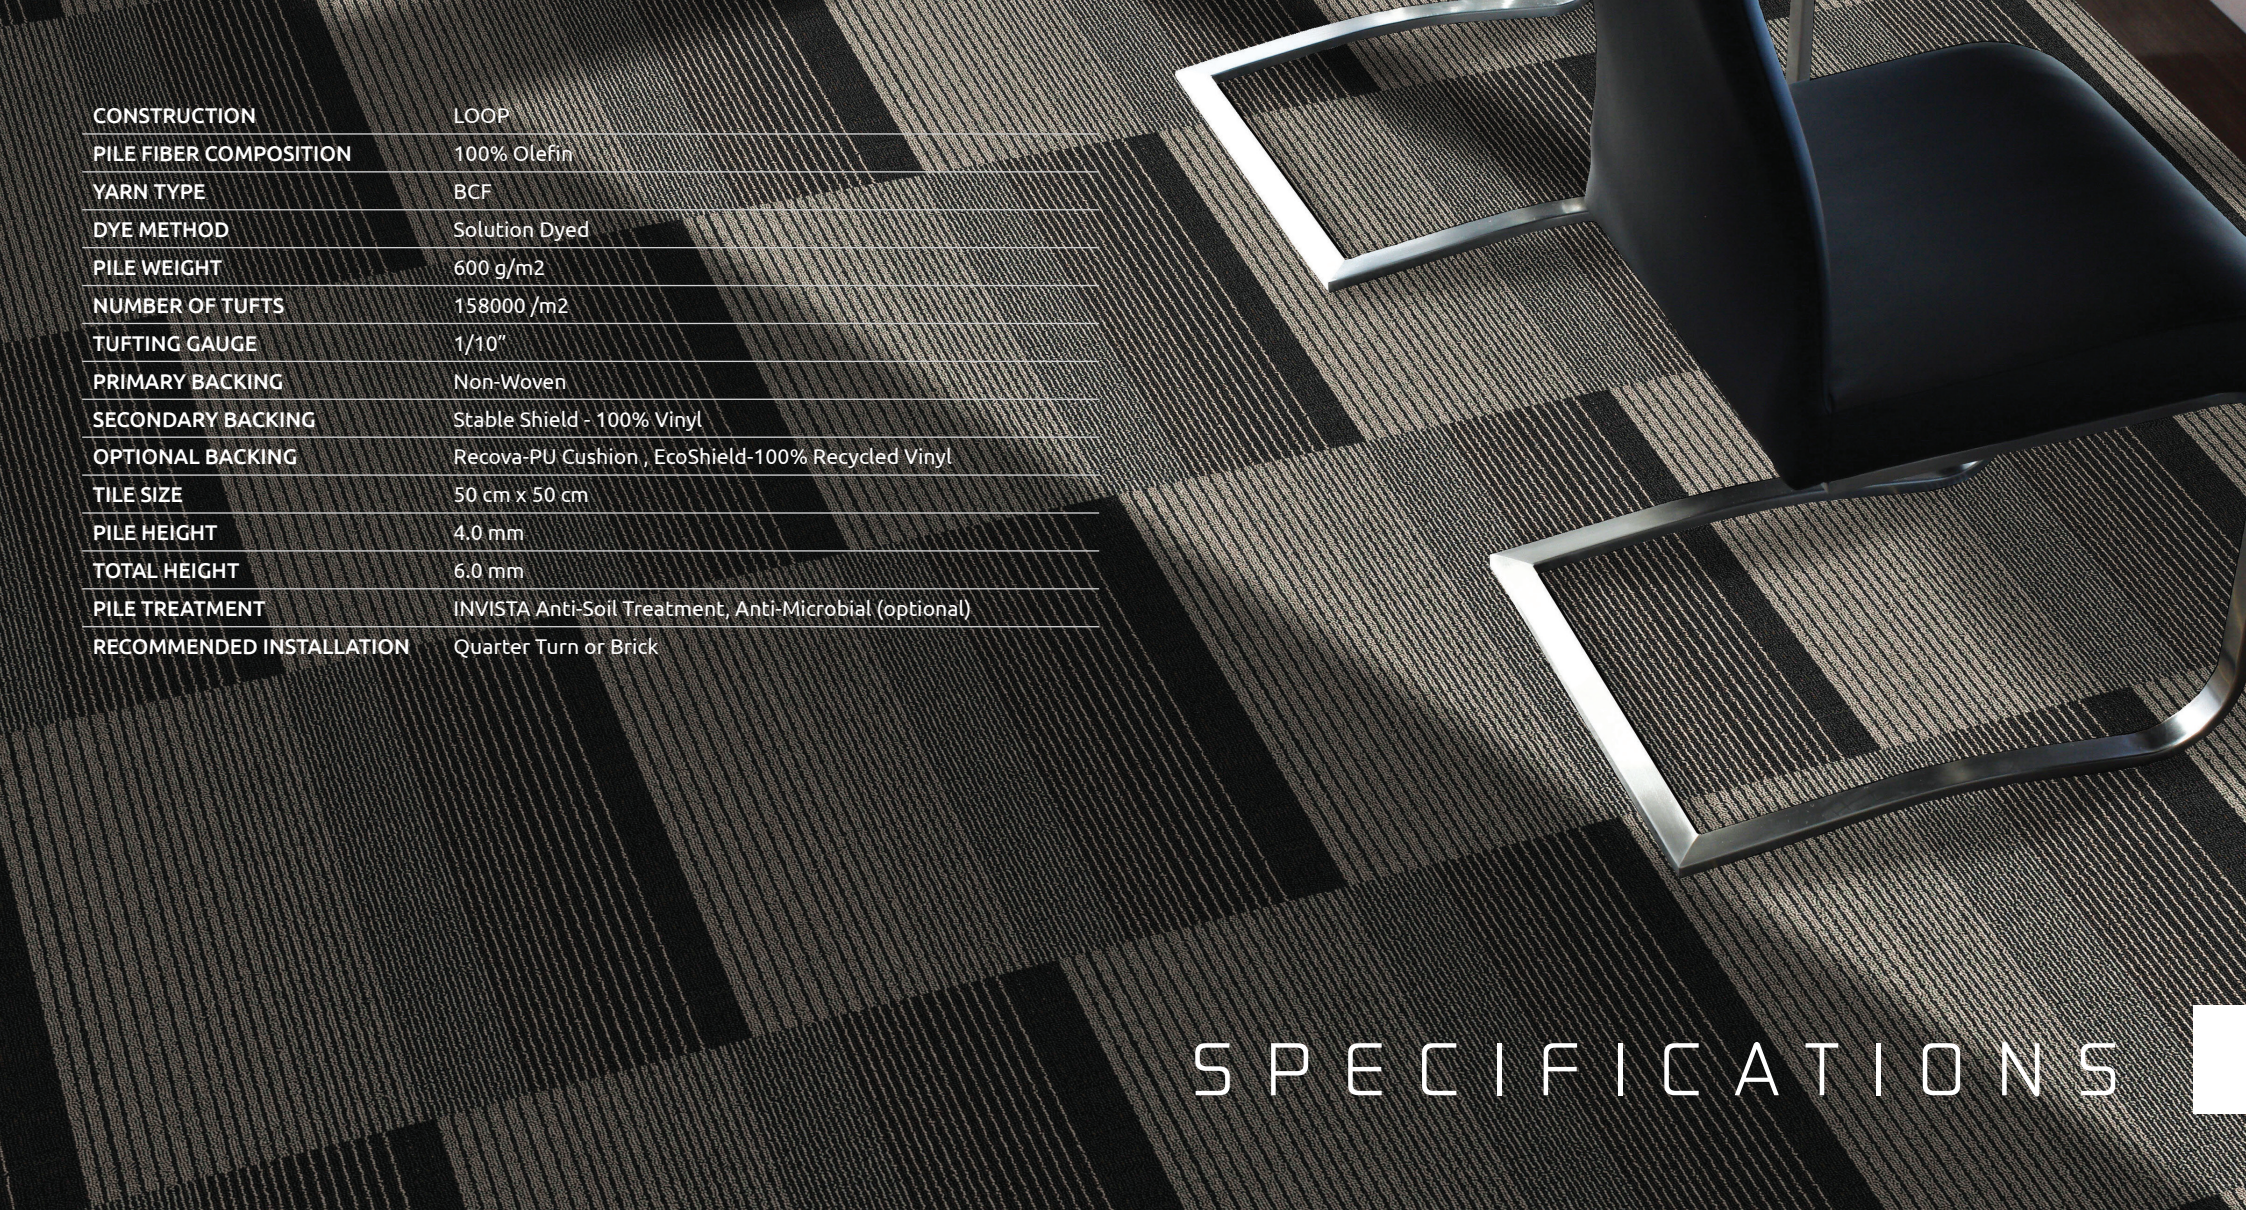


CONSTRUCTION	LOOP
PILE FIBER COMPOSITION	100% Olefin
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	600 g/m ²
NUMBER OF TUFTS	158000 /m ²
TUFTING GAUGE	1/10"
PRIMARY BACKING	Non-Woven
SECONDARY BACKING	Stable Shield - 100% Vinyl
OPTIONAL BACKING	Recova-PU Cushion , EcoShield-100% Recycled Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	4.0 mm
TOTAL HEIGHT	6.0 mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS


COLOURLINE




AMBIENT - 524




AMBIENT - 542




AMBIENT - 547




AMBIENT - 549




AMBIENT - 555




AMBIENT - 556




AMBIENT - 557




AMBIENT - 570




AMBIENT - 571




AMBIENT - 575



AMBIENT - 577




AMBIENT - 578

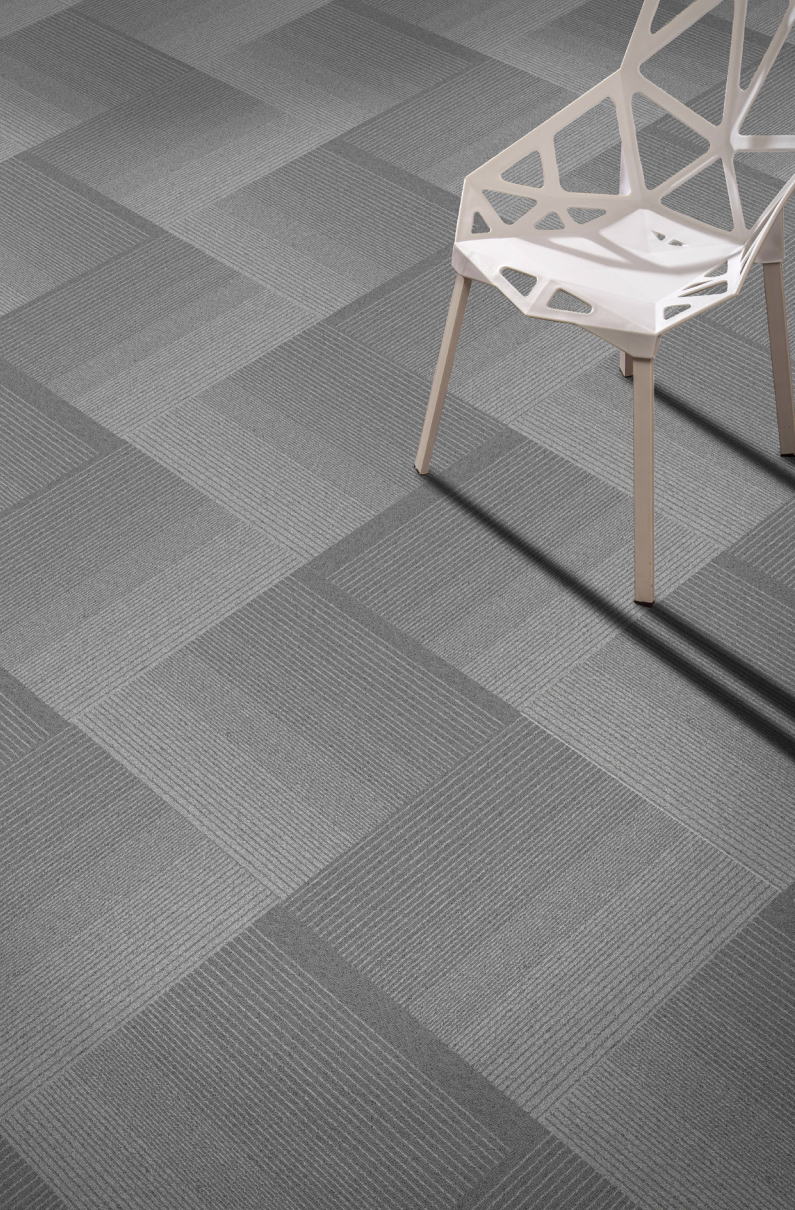




HOW TO INSTALL

QUARTER TURN

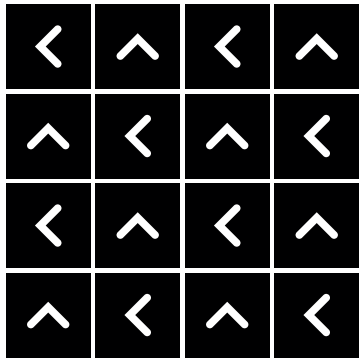

BRICK

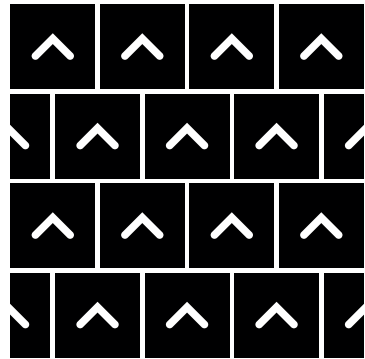



Standard
CARPETS

www.standardcarpets.com