



VELOCITY

CONSTRUCTION	Loop Pile
PILE FIBER COMPOSITION	100% Nylon (Polyamide 6)
YARN TYPE	BCF
DYE METHOD	Solution Dyed
PILE WEIGHT	700g/m2
NUMBER OF TUFTS	165900/m2
TUFTING GAUGE	1/12"
PRIMARY BACKING	Non-Woven
BACKING STRUCTURES	Stable Shield - 100% Vinyl
TILE SIZE	50 cm x 50 cm
PILE HEIGHT	3.0mm / 5.0mm
TOTAL PILE HEIGHT	8.0mm
PILE TREATMENT	INVISTA Anti-Soil Treatment, Anti-Microbial (optional)
RECOMMENDED INSTALLATION	Quarter Turn or Brick

SPECIFICATIONS

COLOURLINE




VELOCITY - 647




VELOCITY - 648



VELOCITY - 657



VELOCITY - 670




VELOCITY - 674



VELOCITY - 6491




VELOCITY - 6591




VELOCITY - 6701



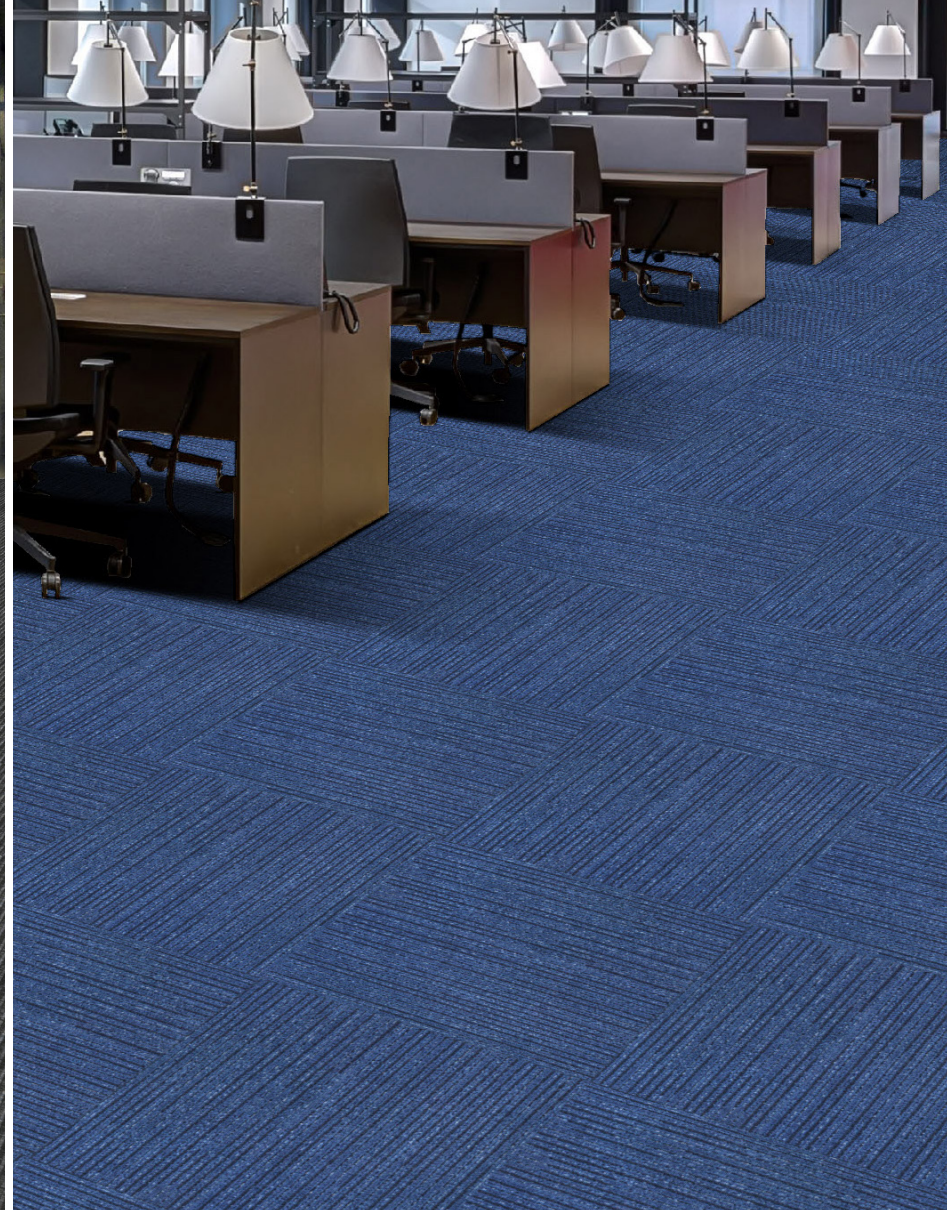


HOW TO INSTALL

QUARTER TURN

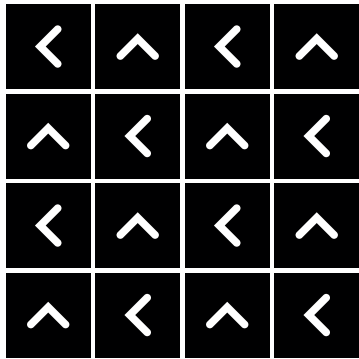

BRICK

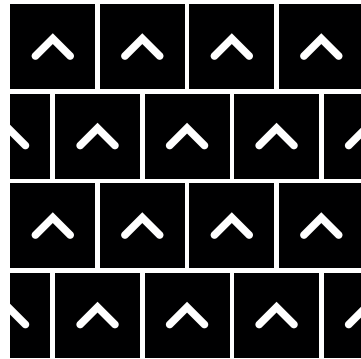



Standard
CARPETS

www.standardcarpets.com